

AFRL-SN-WP-TP-2002-102

**ADVANCED HIGH ELECTRON
MOBILITY TRANSISTOR (HEMT)
MONOLITHIC MILLIMETER-WAVE
INTEGRATED CIRCUIT (MMIC)
CIRCUITS FOR MILLIMETER- AND
SUBMILLIMETER-WAVE POWER SOURCES**



**Lorene Samoska
Alejandro Peralta**

MAY 2002

Approved for public release; distribution is unlimited.

**SENSORS DIRECTORATE
AIR FORCE RESEARCH LABORATORY
AIR FORCE MATERIEL COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OH 45433-7318**

20020830 080

NOTICE

USING GOVERNMENT DRAWINGS, SPECIFICATIONS, OR OTHER DATA INCLUDED IN THIS DOCUMENT FOR ANY PURPOSE OTHER THAN GOVERNMENT PROCUREMENT DOES NOT IN ANY WAY OBLIGATE THE US GOVERNMENT. THE FACT THAT THE GOVERNMENT FORMULATED OR SUPPLIED THE DRAWINGS, SPECIFICATIONS, OR OTHER DATA DOES NOT LICENSE THE HOLDER OR ANY OTHER PERSON OR CORPORATION; OR CONVEY ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE, OR SELL ANY PATENTED INVENTION THAT MAY RELATE TO THEM.

THIS REPORT IS RELEASABLE TO THE NATIONAL TECHNICAL INFORMATION SERVICE (NTIS). AT NTIS, IT WILL BE AVAILABLE TO THE GENERAL PUBLIC, INCLUDING FOREIGN NATIONS.


THIS TECHNICAL REPORT HAS BEEN REVIEWED AND IS APPROVED FOR PUBLICATION.



JAMES A. COOK
Project Engineer
RF Components Branch



MARK C. CALCATERA, Chief
RF Components Branch
Aerospace Components Division

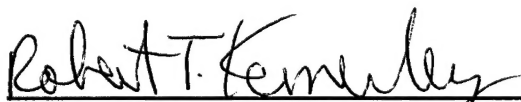

ROBERT T. KEMERLEY, Chief
Aerospace Components Division
Sensors Directorate

Do not return copies of this report unless contractual obligations or notice on a specific document requires its return.

REPORT DOCUMENTATION PAGE				<i>Form Approved</i> OMB No. 0704-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YY) May 2002		2. REPORT TYPE Conference Paper Preprint		3. DATES COVERED (From - To) 09/01/2001 – 03/01/2002	
4. TITLE AND SUBTITLE ADVANCED HIGH ELECTRON MOBILITY TRANSISTOR (HEMT) MONOLITHIC MILLIMETER-WAVE INTEGRATED CIRCUIT (MMIC) CIRCUITS FOR MILLIMETER- AND SUBMILLIMETER-WAVE POWER SOURCES				5a. CONTRACT NUMBER F33615-99-C-1512	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 61101E	
6. AUTHOR(S) Lorene Samoska Alejandro Peralta				5d. PROJECT NUMBER ARPS	
				5e. TASK NUMBER ND	
				5f. WORK UNIT NUMBER OE	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) HRL Laboratories, LLC 3011 Malibu Canyon Rd. Malibu, CA 90265				8. PERFORMING ORGANIZATION REPORT NUMBER AFRL-SN-WP-TP-2002-102	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) SENSORS DIRECTORATE AIR FORCE RESEARCH LABORATORY AIR FORCE MATERIEL COMMAND WRIGHT-PATTERSON AIR FORCE BASE, OH 45433-757318				10. SPONSORING/MONITORING AGENCY ACRONYM(S) AFRL/SNDM	
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER(S) AFRL-SN-WP-TP-2002-102	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES Paper presented at the Far Infrared, Submillimeter and Millimeter Detector Technology Workshop, Monterey, CA, 01 April 2002.					
14. ABSTRACT (Maximum 200 Words) This paper focuses on InP-based, HEMT Monolithic Millimeter-wave Integrated Circuit (MMIC) power amplifiers for applications to heterodyne receivers, transmitters, and communication circuits. Recently, JPL has developed several HEMT MMIC circuits using HRL Laboratories' 0.1 μ m InP HEMT technology with unprecedented high frequency performance and output power. Results include an 80 GHz bandwidth power amplifier to 145 GHz, a 15-25 mW amplifier to 170 GHz and a HEMT active doubler to 300 GHz, the highest frequency HEMT doubler circuit reported to date. Included here is a description of the design and testing of the circuits, and a discussion of the methods used in measuring MMICs above 200 GHz. These circuits are particularly useful in local oscillators for heterodyne receivers at THz frequencies.					
15. SUBJECT TERMS InP-based HEMTs, active frequency doublers, millimeter- and submillimeter-wave power sources					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT: SAR	18. NUMBER OF PAGES 10	19a. NAME OF RESPONSIBLE PERSON (Monitor) James A. Cook 19b. TELEPHONE NUMBER (Include Area Code) (937) 255-4831 x3485
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			

ADVANCED HEMT MMIC CIRCUITS FOR MILLIMETER- AND SUBMILLIMETER-WAVE POWER SOURCES

Lorene Samoska, Alejandro Peralta
Jet Propulsion Laboratory, MS 168-314, 4800 Oak Grove Dr., Pasadena, CA 91109, USA

ABSTRACT

This paper focuses on InP-based, HEMT Monolithic Millimeter-wave Integrated Circuit (MMIC) power amplifiers for applications to heterodyne receivers, transmitters, and communications circuits. Recently, we have developed several HEMT MMIC circuits using HRL Laboratories' 0.1 μm InP HEMT technology with unprecedented high frequency performance and output power. Our results include an 80 GHz bandwidth power amplifier to 145 GHz, a 15-25 mW amplifier to 170 GHz and a HEMT active doubler to 300 GHz, the highest frequency HEMT doubler circuit reported to date. We will report on the design and testing of the circuits, and discuss the methods involved in measuring MMICs above 200 GHz. These circuits are particularly useful in local oscillators for heterodyne receivers at THz frequencies.

INTRODUCTION

We first describe several MMIC power amplifier and active multiplier chips, fabricated in HRL Laboratories' 0.1 μm InP High Electron Mobility Transistor (HEMT) technology. Previous work in the area of power amplifiers includes many excellent results[1,2] at W-Band (75-110 GHz), and there are many applications to drivers for local oscillators in heterodyne systems using these chips. In this paper, we discuss the next generation of MMIC power amplifiers, with HEMT MMIC results up to 300 GHz. We also discuss the challenges of measuring MMICs at high frequencies and present the measurement results.

ADVANCED HEMT MMICS

Wideband Medium Power MMIC Amplifiers

First, we present the results of an 80% bandwidth medium power amplifier chip, the details of which are discussed in Ref 3. All of the amplifiers presented here make use of grounded co-planar waveguide topology (CPWG), and were designed using MMICAD and HP MDS. The first amplifier, referred to as PA1, employed three stages (Figure 1). The first two stages used HEMTs having 4 gate fingers 37 microns wide, and the third stage combined two 4x37 HEMTs in parallel. The total device periphery in the output stage is 300 μm . Typical device breakdown voltage was 4 V. We packaged this amplifier in a WR8

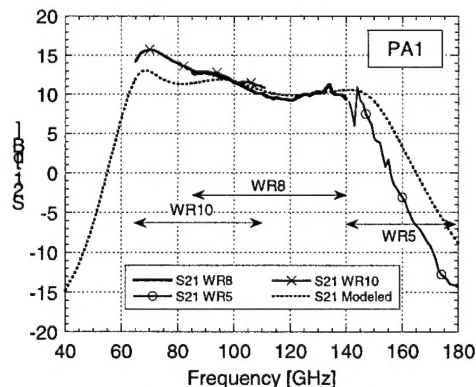
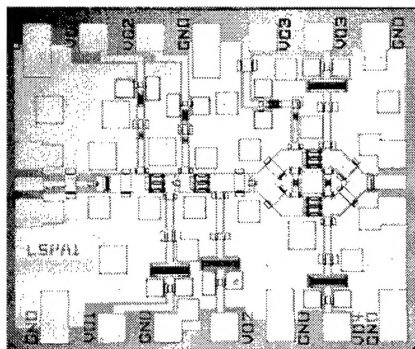


Figure 1: Chip photo and measured data for a > 80 GHz wide, 65-150 GHz InP medium power amplifier MMIC. Data was measured in three waveguide bands.

Contact information for L. Samoska: Email: lorene@merlin.jpl.nasa.gov, phone (818) 354-0849

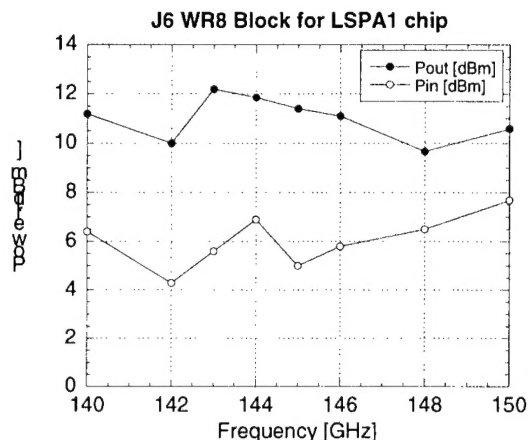
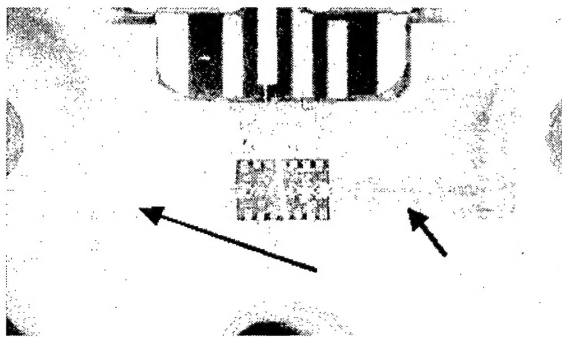


Figure 2: Module photo at left showing MMIC of figure 1 and probe transitions to waveguide (arrows). At right is the measured power from the module (approximately 10 mW or more from 140-150 GHz).

waveguide housing (Figure 2), and measured it for output power characteristics. The output power was found to be between 10-30 mW over the entire bandwidth, with the 140-150 GHz band shown in Figure 2. Such an amplifier would make a useful gain stage for a wide-band local oscillator.

MMIC Power Amplifier to 170 GHz

In addition, we report on a second medium power amplifier chip from 140-170 GHz, thus far the highest frequency power amplifier chip reported to date [4]. The chip exhibits 10 dB of small signal gain from approximately 144-170 GHz, with input and output return losses of 10 dB at 165 GHz. From 140-170 GHz, 15 to 25 mW (11.8 – 14 dBm) of output power is achieved across the band. Modeling of the HEMT devices suggests that power amplifier designs are possible to 300 GHz. Thus far, new designs are currently being fabricated to test chip performance up to 200 GHz. Current work involved packaging the chip in a WR5 waveguide housing, similar to Figure 2.

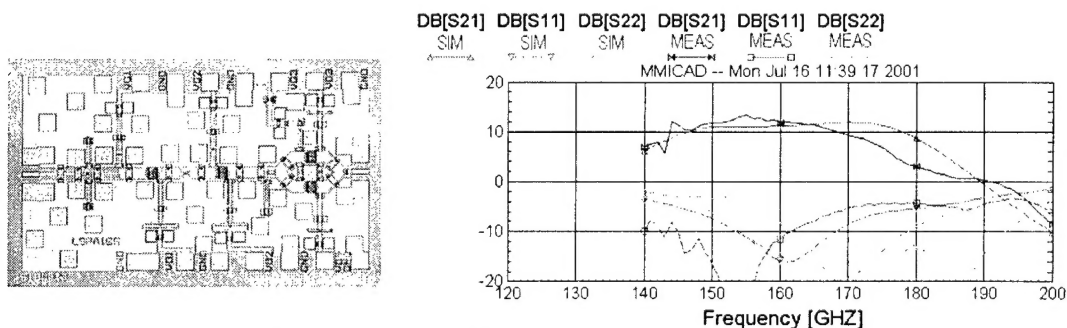


Figure 3: Left: Chip photo; Right: measured (MEAS) and simulated (SIM) S-parameter data from a 15 mW medium power amplifier to 170 GHz.

HEMT MMIC Doublers

Active HEMT doublers have the potential for higher conversion efficiency than Schottky diode doublers. They also have the advantage of being integrated with oscillators and amplifiers on a MMIC. Previous HEMT doublers include a 164 GHz HEMT doubler with only 2 dB of conversion loss and 5 dBm of output power [5]. The highest frequency HEMT doubler previously reported is a 180 GHz, 250 μ W chip with 6 dB of conversion loss [6]. We now report on a HEMT MMIC doubler with approximately 1% conversion efficiency at 292 GHz, the highest frequency of operation for a HEMT doubler circuit to date. The doubler chip layout is shown in Figures 4 and 5. The input was matched to the fundamental frequency of 150 GHz, while the output matching was intended to suppress the fundamental and match to the second harmonic.

MMIC MEASUREMENTS UP TO 300 GHz

Figure 4 shows the schematic of the measurement system for the 300 GHz doubler. A BWO was used for the W-band source, and was followed by a multiplier from Millitech from 140-170 GHz. Waveguide wafer probes from GGB Industries were attached to the Millitech doubler and provided a means of getting power to the MMICs. The power amplifier chip of Figure 3 was wire-bonded to the active HEMT doubler, in order to provide more input power to the final doubler than was available from the multiplier. The output of the doubler was then fed into a second waveguide wafer probe, and a power meter was used to detect the power passing through the wafer probe. A section of WR3 waveguide between the final doubler chip and the power meter ensures that power measured is not less than 173 GHz, so that no fundamental power can leak through. Figure 5 shows the results of doubler testing. It is imperative that the fundamental frequency (which may radiate from wire bonds in the power amplifier, or leak through the doubler) be prevented from reaching the power meter, in order to separate out power from the second harmonic in the doubler. We have achieved nearly 1% conversion efficiency and 81 μW of power at 292 GHz, with at least 40 μW at 300 GHz.

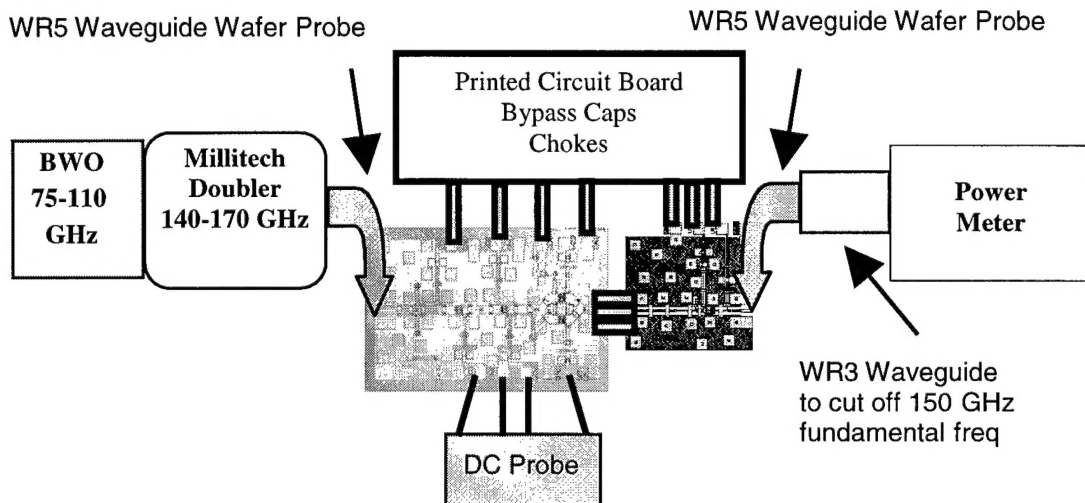


Figure 4: Test setup of power measurements on-wafer at 300 GHz. Power amplifier chip is wire-bonded to the HEMT doubler. The output of the doubler is fed into a waveguide wafer probe, the fundamental frequency is cut-off by a section of WR3 waveguide, and a power meter is used to detect the power passing through the wafer probe.

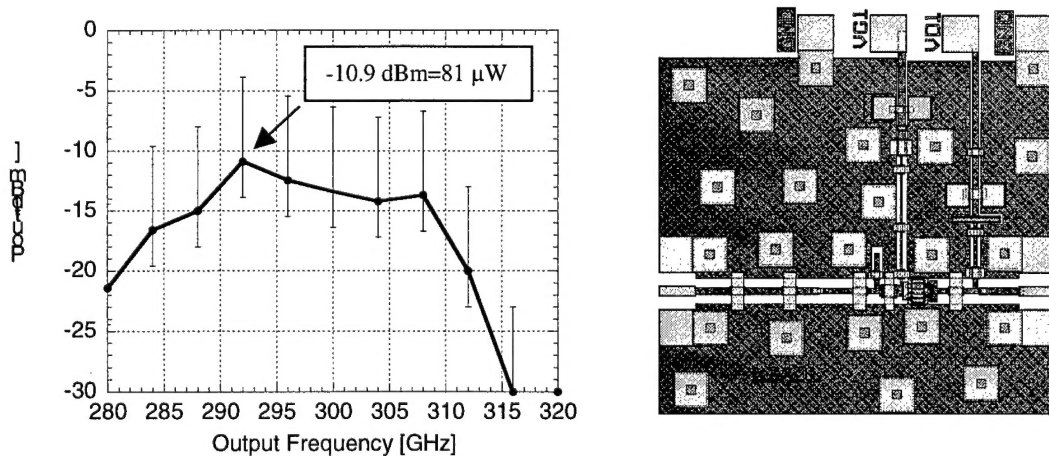


Figure 5: Measured output power from a HEMT doubler on-wafer. Error bars indicate the uncertainty in the waveguide wafer probes at 300 GHz. At right is chip layout.

Wafer probing is very challenging at these frequencies, because to date no wafer probes exist which are optimized for 300 GHz performance. However, we are working with GGB Industries to develop the first WR3 waveguide wafer probe, which we will characterize with Oleson Microwave's WR3 Vector Network Analyzer frequency extension modules. In any case, for a real subsystem, wafer probing is limited to the testing area, and a permanent solution to interfacing 300 GHz MMICs with waveguide-compatible technology must be found. Several avenues of research are being pursued, one of which is an integrated E-plane probe technology, such as that developed by S. Weinreb in [7], or a quasi-Yagi antenna approach, pioneered for MMICs in [8]. Approaches like these can eliminate lossy wire-bonding and reduce the need for higher frequency wafer probes.

FUTURE WORK

Wide-band, medium power amplifiers and active doublers such as those described in this paper may be useful for the local oscillators in large scale telescopes such as the Atacama Large Millimeter Array, and follow-on missions to SWAS and the Herschel Space Observatory's HIFI instrument. These MMIC chips represent a small fraction of the potential of InP HEMT MMIC technology in the future. Based on the extracted device models, 300 GHz MMIC amplifiers should be possible with this technology, and improvements to the HEMT technology should result in power amplifiers well into submillimeter-wavelengths. Advances in transition and planar antenna design with integration onto the MMICs will enable ease of testing, and permit submillimeter waveguide-compatible amplifiers for local oscillator subsystems in future astrophysics instruments.

ACKNOWLEDGMENTS

The authors would like to thank HRL Laboratories, LLC, for the fabrication of the MMIC chips, and especially Dave Chow, Miro Micovic, and Vesna Radisic. This work was partially funded by DARPA under contract number F33615-99-C-1512. The authors would also like to thank Dr. Edgar Martinez of DARPA for guidance in this project. The research described in this paper was carried out in part at the Jet Propulsion Laboratory, California Institute of Technology under a contract with the National Aeronautics and Space Administration.

Special acknowledgments to Douglas Dawson, Sander Weinreb, Todd Gaier and Peter Siegel, of the Jet Propulsion Lab-Caltech, for helpful discussions, technical expertise, and the use of lab facilities. Thanks also to Erik Daniel of the Mayo foundation for help with mounting the high frequency MMICs. In addition, we would like to thank Kevin Leong and Tatsuo Itoh of UCLA, for discussions on quasi-Yagi antennas and application to MMICs.

REFERENCES

1. D. Ingram, et. al, "A 427 mW, 20% Compact W-Band InP HEMT MMIC Power Amplifier," *1999 IEEE Radio Frequency Integrated Circuits Symposium*, Anaheim, CA pp. 95-98.
2. H. Wang, L. Samoska, et al, "Power Amplifier Modules Covering 70-113 GHz Using MMICs," *IEEE Transactions on Microwave Theory and Techniques*, Vol. 49, No. 1, January, 2001, pp. 9-16.
3. L. Samoska, and Y. C. Leong, "65-145 GHz InP MMIC HEMT Medium Power Amplifiers," *IEEE MTT-S 2001 International Microwave Symposium Digest*, Phoenix, AZ, Vol. 3, May, 2001, pp. 1805-1808.
4. L. Samoska, et. al, "InP MMIC Chip Set Covering 80-170 GHz," *Proceedings of the Twelfth International Symposium on Space Terahertz Technology*, San Diego, CA, Dec. 2001.
5. V. Radisic et. al, "164 GHz MMIC HEMT Doubler," *IEEE Microwave and Wireless Components Letters*, Vol. 11, No. 6, June, 2001, pp. 241-243.
6. Y. Kwon, et. al, "180 GHz InAlAs/InGaAs HEMT monolithic integrated frequency doubler," *IEEE GaAs IC Symposium Digest*, 1991, pp. 165-168.
7. S. Weinreb, T. Gaier, R. Lai, M. Barsky, Y. C. Leong, and L. Samoska, "High Gain 150-215 GHz MMIC Amplifier with Integral Waveguide Transitions," *IEEE Microwave and Guided Wave Letters*, Vol. 9, No. 7, July 1999, pp. 282-284.
8. K. Leong, V. Radisic, L. Samoska, Y. Qian, and T. Itoh, "Monolithic Millimeter-Wave Source Incorporating Planar Surface Wave Assisted Antenna," *European Microwave Conference*, 2001.